
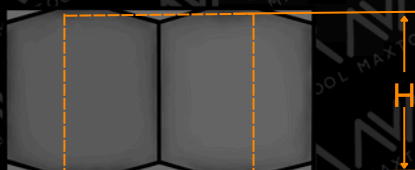


TUERCA HEXAGONAL 2H

TUERCA HEXAGONAL 2H

DIÁMETRO PULGADAS	HILOS POR PULGADA	F	G	H
		DISTANCIA ENTRE CARAS	DISTANCIA ENTRE ESQUINAS	ALTURA
1/2"	13	7/8"	1	31/64"
9/16"	12	15/16"	1 1/32"	35/64"
5/8"	11	11/16"	1 7/32"	39/64"
3/4"	10	1 1/4"	1 7/16"	47/64"
7/8"	9	17/16"	1 21/32"	55/64"
1"	8	1 5/8"	7/8"	63/64"
1 1/8"	8	1 13/16"	2"	17/64"
1 1/4"	8	2"	2 5/16"	17/32"
1 3/8"	8	2 3/16"	2 1/2"	1 11/32"
1 1/2"	8	2 3/8"	2 3/4"	1 15/32"
1 5/8"	8	2 9/16"	3"	1 19/32"
1 3/4"	8	2 3/4"	3 11/64"	1 23/32"
1 7/8"	8	2 15/16"	3 25/64"	1 27/32"
2"	8	3 1/8"	3 39/64"	1 31/32"



ORIGEN	NOMBRE	TUERCA ASIGNADA	NORMA	TIPO DE ROSCA
Importado	Tuerca 2H	No Aplica	ANSI B 18.2.2 ANSI B 1.1-2B	UNC (rosca ordinaria)
CALIDAD O GRADO	USOS	EMPAQUE	ACABADO	MATERIAL
Grado 2H	General	Granel	Pavonada	Acero medio carbono tratado térmicamente



ventas@maxtool.com.mx



(55) 5668 - 1000



www.maxbolt.mx

